


17196/



ENVIRONMENTAL SAFETY SYSTEMS, INC.

800 E. Northwest Hwy., Suite 700 Palatine, IL 60067 (708) 843-8449

June 5, 1991


Mr. David Greco
ARROW GEAR COMPANY
2301 Curtiss Street P.O. Box #
Downers Grove, IL 60515

Dear Dave:

Whatever fuels or hazardous materials you need to store, Ultra-Tank is the ultimate solution. Ultra-Tank gives you the security of a UL listed Double Wall containment system, combined with the convenience of an above-ground storage tank. Built of rugged 10-gauge steel, Ultra-Tank meets NFPA 30 and allows you to achieve full regulatory compliance for the storage of hazardous materials. Ultra-Tank is available in single or double wall units, and is excellent for storing and dispensing waste oils, gasoline, diesel fuel, lubricants, agricultural wastes, coolants and solvents. Ultra-Tank eliminates the cost and liability of installing or replacing underground tanks, and its rectangular design lets you make the most of your valuable space.

SPECIFICATIONS:

- UL Underwriters Laboratory Approved
- 10 Gauge Prime Steel
- Continuous Welded Construction
- For Lift Channels For Convenient Relocation
- Reflective High Gloss Acrylic Enamel Exterior
- Finishes - Green, Red, Black, Yellow, White
 - White ordered if not specified



ENVIRONMENTAL SAFETY SYSTEMS, INC.

800 E. Northwest Hwy., Suite 700 Palatine, IL 60067 (708) 843-8449


UT480-2

ULTRA-TANK, DOUBLE WALL ABOVE GROUND TANK - UT-500-2

- Capacity 500 Gallons
- Dimensions - 5'-3" X 5'-4" X 3'-3" (L X H X W)
- Weight - 1003 lbs **7'-6" X 3'-11" X 3'-0" L X H X W**
- 24" Manway
- Level Tank Gauge
- Inspection Sight Glass
- \$2,705.00

Optional Equipment:

- 10" Diameter Fill Hatch (Quick opening & Lockable)
- Direct Reading Tank Gauge
- Remote Reading Fill Gauge
- Built in Suction Pipe
- ✓ 2" Quick Disconnect **(35.00)**
- ✓ Inspection Sight Glass
- Tank Mounted Pumps and Heaters
- Special Interior Coating
- Custom Exterior Finishes

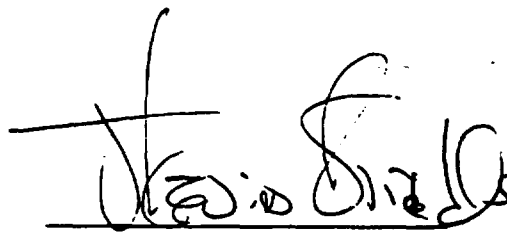
Kevin Shields

John Metcalfe - Cust. Service

THE ULTIMATE SOLUTION

ULTRA-TANK

INSTALLATION OF ABOVEGROUND STEEL STORAGE TANKS

Aboveground Storage Tanks for Flammable and Combustible Liquids are manufactured and tested by Ultra-Tank in accordance with the requirements of the Underwriters' Laboratories Standard UL-142.

Proper installation is of utmost importance to ensure the expected service and life of the tank. The following installation suggestions are furnished for your consideration:

1. Handle the tank carefully. Use cables or chains of adequate length (not more than 90° between the chains) attached to fit lugs provided. Oversize hooks will tear the lift lugs - use shackles, if necessary.
2. To insure compliance with applicable codes and regulations, tank and piping should be retested at jobsite before being enclosed or placed in use, using 5 PSIG air pressure as soap solution is brushed over weld seams. Replace tin or plastic caps with pipe plugs or capped piping before test.
3. Install appropriate primary and emergency vent connections as indicated on tank and drawings.
4. Identify tank and surrounding area as containing "Flammable" material and provide appropriate warnings such as "No Smoking" and/or "No Open Flames".
5. Do not cut or weld on any tank that contains flammable or combustible liquids or vapors. Fire or explosion may result.
6. Contact your local fire marshal to assure compliance with local regulations and codes.

THE ULTIMATE SOLUTION

ULTRA-TANK

ULTRA-TANK

WARRANTY

LCI-ULTRA-TANK warrants its UL listed, double-wall steel tanks for a period of one (1) year from the date of purchase. The warranty covers all defects in materials and workmanship. LCI will repair or replace, at its discretion, any part which proves to be defective during the warranty period.

This warranty does not apply to damage resulting from accident, neglect, or misuse. Furthermore, it is agreed that LCI is not and shall not be liable for claims arising from the use of this product.

UltraTank

UltraTanks are available in a wide range of sizes with the features you need for safety, compliance and convenience.

| Capacity (Gallons) | Single Wall UL Listed (SW-UL) | Double Wall UL Listed (DW-UL) |
|-----------------------|----------------------------------|----------------------------------|
| | Dimensions* (L x W x H) | Dimensions** (L x W x H) |
| 120 | 2' 2" x 2' 6" x 3' 0" | 2' 5" x 3' 1" x 3' 4" |
| 280 | 5' 0" x 2' 6" x 3' 0" | 5' 3" x 3' 1" x 3' 4" |
| 375 | 5' 0" x 2' 6" x 4' 0" | 5' 3" x 3' 1" x 4' 4" |
| 480 | 7' 3" x 3' 4" x 2' 8" | 7' 6" x 3' 11" x 3' 0" |
| 500 | 5' 0" x 2' 8" x 5' 0" | 5' 3" x 3' 3" x 5' 4" |
| 650 | 6' 6" x 2' 8" x 5' 0" | 7' 4" x 3' 0" x 5' 4" |
| 1,000 | 10' 0" x 2' 8" x 5' 0" | 10' 10" x 3' 0" x 5' 4" |
| 1,500 | 15' 0" x 2' 8" x 5' 0" | 15' 10" x 3' 0" x 5' 4" |
| 2,000 | 18' 0" x 2' 6" x 6' 0" | 18' 10" x 2' 10" x 6' 4" |
| 3,000 | 20' 0" x 4' 0" x 5' 0" | 20' 10" x 4' 4" x 5' 4" |

* Add 4" to height for Support Channels
** Add 1-1/2" to height for Support Channels

** Add 1-1/2" to height for Support Channels

Standard Features:

- UL-142 Listed
- Built of rugged 10-gauge steel
- Space-saving rectangular design
- All welded construction
- Lifting lugs & forklift channels for easy relocation
- NPT threaded openings for vents, fill, pump out, level gauge and inspection
- Requires no special site preparation
- Exterior finish - high gloss enamel

Optional Features:

- 10" Diameter fill hatch (Quick opening & lockable)
- Direct reading tank gauge
- Remote reading tank gauge
- Built-in suction pipe
- Inspection sight-glass
- High & low level alarms
- Tank mounted pumps & heaters
- Special interior coatings
- Custom exterior finishes

Standard Colors:

Green • Red • Black • Yellow • White

Fast nationwide availability from our plants

Pennsylvania • Maryland • Indiana • North Carolina • Kansas • Texas • California

For more information, please contact UltraTank or your local authorized distributor.



UltraTank

**Give us your fuels, your oils,
your hazardous materials, your
flammable liquids...**

Whatever fuels or hazardous materials
you need to store, UltraTank® is the
ultimate solution. UltraTank gives you
the security of a UL listed Double Wall

containment
system, combined
with the
convenience
of an above-
ground
storage tank.

Built of
rugged 10-
gauge steel,
UltraTank
meets NFPA
30 and allows
you to achieve
full regulatory
compliance for

the storage of
hazardous materials.

UltraTank is available in
single or double wall units, and is
excellent for storing and dispensing
waste oils, gasoline, diesel fuel, lubri-
cants, hydraulic oils, coolants and
solvents.

UltraTank eliminates the cost and
liability of installing or replacing under-
ground tanks, and its rectangular design
lets you make the most of your valuable
space.

For more information, give us a call
at 800 852-1809.



 **UltraTank**